

HD-Box

Användarmanual

CDIG-1000C

Det förinställda lösenordet är 0000



HUMAX

Observera

Tack för att du valde en HUMAX produkt. Läs denna bruksanvisning noggrant för att säkert kunna installera, använda och underhålla produkten med maximal prestanda. Spara denna bruksanvisning bredvid din produkt för framtida behov. Informationen i denna bruksanvisning kan ändras utan föregående meddelande.

Copyright (Copyright © 2014 HUMAX Corporation)

Denna manual får inte kopieras, användas eller översättas delvis eller i sin helhet utan HUMAX skriftliga medgivande.

Symbolers betydelse

	För att minska risken för elektriska stötar, ta inte bort locket (eller baksidan). Överlåt service till kvalificerad servicepersonal.
	Den här symbolen anger farlig spänning i produkten som innebär risk för elektriska stötar eller personskador.
	Den här symbolen markerar viktiga anvisningar gällande produkten.

Varningar, försiktighetsåtgärder och anmärkningar

Genom hela manualen bör du vara särskilt uppmärksam på följande anmärkningar med information om farliga situationer.

Varning

Indikerar en farlig situation som kan leda till allvarliga skador

Varning

Indikerar en situation som kan skada utrustningen eller andra enheter

Anmärkning

Ytterligare information som uppmärksammar användaren på möjliga problem samt information som kan vara viktig för att förstå, använda och underhålla installationen.

Garanti

Garantin täcker inte skador som uppkommer pga. av felaktig användning av informationen i denna bruksanvisning.

'WEEE' Direktiven

Denna produkt får inte kastas med annat hushållsavfall i slutet av dess livstid. Denna produkt skall separeras från andra typer av avfall och återvinnas ansvarsfullt för att främja hållbar återanvändning av materiella resurser. Detta kommer att förhindra eventuell skada på miljön eller människors hälsa på grund av okontrollerad avfallshantering.

Inhemska användare:

Vänligen kontakta antingen den återförsäljare där du köpte produkten eller din lokala kommun för information om var och hur de kan lämna in produkten för miljösäker återvinning.

Företagsanvändare:

Kontakta din leverantör och kontrollera villkoren i köpekontraktet. Denna produkt får inte blandas med annat kommersiellt avfall för bortskaffande.

Varumärken

- Conax är ett varumärke som tillhör Kudelski Group.
- Tillverkad under licens från Dolby Laboratories.
Dolby och dubbel-D-symbolen är varumärken som tillhör Dolby Laboratories.
- HDMI, HDMI-logotypen och High-Definition Multimedia Interface är varumärken och registrerade varumärken som tillhör HDMI Licensing LLC.

HDMI™

Denna produkt innehåller kopieringsskyddsteknik som skyddas av patent i USA och andra immateriella rättigheter som tillhör Rovi Corporation.
Det är förbjudet att ta isär produkten.

Notera: The model name is located on the bottom of this product.

EU regler

Härmed intygar HUMAX Co., Ltd, att denna CDIG-1000C står i överensstämmelse med de grundläggande kraven och andra relevanta bestämmelser i EG-direktiven

- 2006/95 / EG - LVD-direktivet
- 2004/108 / EG - EMC-direktivet
- 2009/125 / EG - ErP direktivet
- 2009/65 / EU - RoHS-direktivet



Produkten är CE-märkt.

Deklarationen om överensstämmelse har gjorts enligt EU-direktiv och är tillgänglig för visning på följande plats i EU-gemenskapen:
<http://www.humaxdigital.com/global/support/support.html>

För din säkerhet

Säkerhetsinstruktioner

1. STRÖMFÖRSÖRJNING

- Koppla endast in produkten till den typ av strömkälla som anges på etiketten.
- Bryt strömmen innan du börjar underhålls- eller installationsprocedurer.

2. ÖVERBELASTNING

- Se till att vägguttaget, förlängningssladden och adaptren har tillräcklig effekt för apparaten. Om inte, kan det orsaka en elektrisk brand.

3. VÄTSKA

- Låt ej HD-boxen komma i kontakt med vätska.

4. RENGÖRING

- Innan du rengör HD-boxen, koppla ur strömmen.
- Använd en fuktig trasa för att rengöra produkten. Använd inte lösningsmedel. Torka ytan försiktigt med en mjuk trasa eftersom den kan repas.

5. VENTILATION

- Se till att kylflänsar på HD-boxen inte är blockerade då det är nödvändigt att ha ett tillräckligt luftflöde.
- Placera inte elektronisk utrustning på HD-boxen.
- Placera inga föremål på HD-boxen. Detta kommer att blockera ventilationen eller orsaka skada på ytan.

6. TILLBEHÖR

- Använd inga icke godkända tillbehör eftersom de kan vara farliga eller skada produkten.

7. BLIXT, STORM OCH VID AVSTÄNGNING

- Koppla bort HD-boxen från vägguttaget och koppla ur antennen under åskväder eller när den lämnas oanvänd och utan tillsyn en längre tid. Det förebygger skador på enheten till följd av blixtnedslag och överbelastning.

8. FRÄMMANDE OBJEKT

- För inte in något objekt i öppningarna på HD-boxen då den kan skada utrustningen eller komma i kontakt med spänning.

9. UTBYTE AV DELAR

- När det krävs byte av delar, se till att serviceteknikern använder sådana reservdelar som anges av tillverkaren eller sådana som har samma egenskaper som den ursprungliga delen. Felaktiga delar kan orsaka ytterligare skador på HD-boxen.

10. KOPPLA TILL KABEL-TV SIGNAL

- Bryt strömmen innan du ansluter eller kopplar bort kabeln från kabel-TV signalen. Om inte, kan det orsaka skador på Kabel-TV nätet.

11. KOPPLA TILL TV

- Bryt strömmen innan du ansluter eller kopplar bort kabeln från Tv:n. Om inte, kan det leda till skador på din Tv.

12. PLACERING

- Placera produkten inomhus för att undvika exponering för blixtar, regn eller sol. Placera den inte nära ett element eller annan värmekälla.
- Håll minst 10 cm avstånd mellan andra apparater som är känsliga för elektromagnetisk strålning, såsom en TV eller en videobandspelare.
- Om du placerar produkten på ett ställ eller en hylla, se till att det finns tillräcklig ventilation och att du följer tillverkarens monteringsinstruktioner.
- Placera inte produkten på ett instabilt underlag där den kan falla. En fallande produkt kan orsaka allvarliga skador på personal och allvarliga skador på apparaten.

13. MILJÖ

- Uttjanta batterier skall till batteriåtervinning.

Var uppmärksam gällande

1. För att undvika skador på strömkabeln eller kontakten

- Gör inga ändringar eller andra bearbetningar av strömsladden eller kontakten.
- Böj eller vrid inte strömsladden.
- Se till att koppla bort nätkabeln när du håller i kontakten.

- Håll värmekällor så långt som möjligt från strömsladden för att undvika att den täckande vinylen smälter.
- Strömkontakten skall vara lätt tillgänglig för användaren.
- Huvudbrytare skall vara lätt åtkomlig

2. För att undvika elektrisk stöt

- Öppna inte HD-boxen.
- För inte in metallföremål eller lättantändliga föremål i HD-boxen.
- Ta inte i kontakten med våta händer.
- Koppla bort strömkabeln vid åskväder.
- Dra ur strömkabeln innan du installerar antennkabel.

3. För att undvika skador på produkten

- Använd inte HD-boxen när den är ur funktion. Om du fortsätter att använda den defekta produkten kan det orsaka allvarliga skador. Kontakta kundtjänst om HD-boxen inte fungerar.
- För inte in metallföremål eller andra främmande föremål i öppningarna för Smartcard. Det kan orsaka skada på HD-boxen och minska dess livslängd.

Innehåll

Observera	1	TV Guide	11
Innehåll och Tillbehör	2	Inställningar	13
För Din Säkerhet	3	Installation	14
Innehåll		Autosökning	
Tillbehör		Manuell sökning	
Snabbguide	4	Programuppdatering (OTA)	
Fram- & Baksida		Fabriksåterställning	
Fjärrkontroll		System	16
Anslutningar		Appendix	17
Installationsguide		Felsökning	
Redigera kanallista	8	Specifikation	
Programinformation		Open Source Software Notice	
Kanallista			
Redigera kanaler			

Tillbehör



Fjärrkontroll
/ Batterier



Snabbguide



Strömkabel



HDMI-Kabel




RF-Kabel

Notera: Tillbehören kan skilja sig något åt beroende på region.

Fram- & Baksida

Notera: Bilden som visas kan skilja sig från den faktiska produkten.

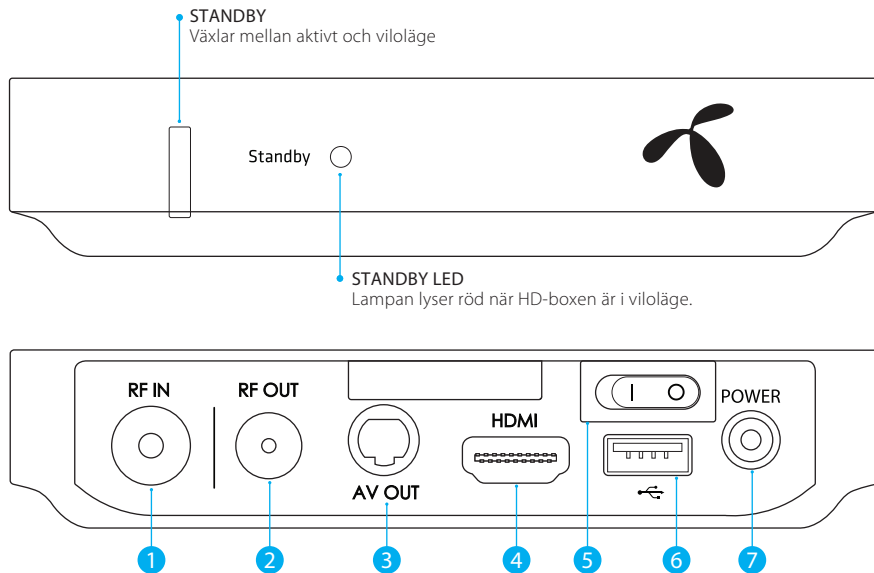

- 1 **RF IN:** Anslut en antennkabel.
- 2 **RF OUT:** Använd en antennkabel för att ansluta en tv eller VCR.
- 3 **AV OUT:** Använd en konverteringskabel för att koppla in Tv med endast SCART kontakt.
- 4 **HDMI:** Använd en HDMI kabel för att koppla till tv.
- 5 **Strömbrytare:** Slå på och av strömmen.
- 6 **USB:** Används inte i dagsläget.
- 7 **POWER:** Använd strömkabel för att koppla in strömmen.


Sätta i ditt programkort

Kortläsaren sitter på HD-boxens högra sida.

1. Håll ditt programkort horisontellt med det elektroniska chipet nedåt.
2. Sätt i programkortet i kortläsaren.




Fjärrkontroll

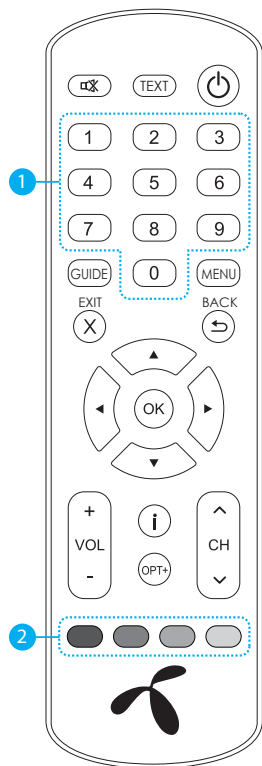

	MUTE	Stänger av och slår på ljud
	TEXT	Text-TV
	STANDBY	Av/På knapp som växlar mellan aktivt- och viloläge
1	NUMERISK	0-9
	GUIDE	TV Guide
	MENU	Huvudmeny
X	EXIT	Gå tillbaka till TV tjänsten
	BACK	Gå tillbaka till tidigare kanal eller meny
	Pilknappar	Förflyttar pekaren upp/ned/höger/vänster
	OK	Välj meny eller bekräfta
	VOL +/-	Volym upp/ned
	i	Visar kanal och programinformation
	OPT+	Visar alternativ
	CH ^/v	Byter kanal eller sida
2	Färgknappar	För interaktiva applikationer

Sätta in Batterier

Sätt in batterier så att de matchar plus (+) och minus (-).

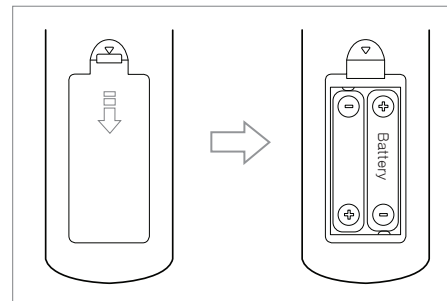


Anslutningar

Det här avsnittet beskriver hur du ansluter produkten för att matcha dina specifika enheter och för att få optimal signalkvalitet.

Varning: Anslut alla enheter innan du ansluter strömsladden i vägguttaget. Stäng alltid av produkten, TV:n och andra enheter innan du ansluter eller kopplar in kablar.

Notera:

- Om du stöter på några problem med att installera produkten, kontakta kundservice.
- Att ansluta tv:n direkt till HDMI-ingången på HD-boxen ger en bättre bildkvalitet.

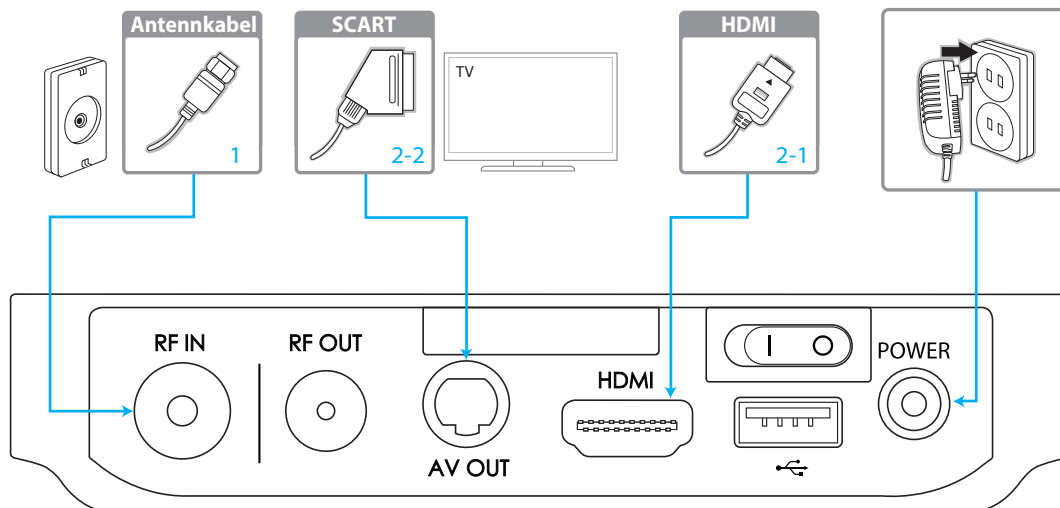

Ansluta antennkabel

Anslut antennkabeln till **RF IN**.

Ansluta tv

2-1 HDMI-kabel

För bästa bildkvalitet, anslut tv med HDMI-kabel.

2-2 SCART-kabel

Används endast om din tv saknar HDMI-ingång och du fått en kabel som konverterar mellan AV OUT-kontakten och SCART.

Slå på strömmen

1. Anslut HD-boxens strömkabel till vägguttaget.
2. Se till att strömbrytaren (POWER) på HD-boxen är påslagen.
3. Slå på strömmen till HD-boxen genom att trycka på **STANDBY** knappen på fjärrkontrollen eller på framsidan av HD-boxen.

Installationsguide

När du startar HD-boxen första gången, eller efter en fabriksåterställning, genomför du nedan fyra steg. När du har valt rätt källa på din tv visas det första steget i guiden – språk.

1. Språk

Välj språk.

2. Skärm

Välj de inställningar som passar din tv bäst.

3. Söka efter kanaler

Kanalsökning startar automatiskt.

Spara funna kanaler när sökningen är klar.


4. Resultat

Resultatet för installationsguiden visas. Stäng guiden genom att välja **Slutför**.

Obs: Om du avslutar installationsguiden utan att ha slutfört kanalsökningen visas kanske inte alla tillgängliga kanaler. I så fall går du till **MENU > Inställningar > Installation** och söker efter fler kanaler.

Programinformation

En informationsguide visas ett par sekunder varje gång du byter kanal. Du kan även trycka på i-knappen på fjärrkontrollen för att visa informationsguiden. Tryck EXIT för att stänga guiden.

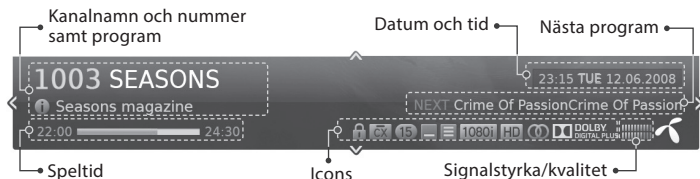

	Detaljerad programinformation Tryck än en gång på i-knappen då guiden visas.
	Föregående/nästa programinformation Tryck på ◀▶ knappen då guiden visas. Tryck på OK knappen för att sätta påminnelser för kommande program.
	Programinformation för andra kanaler Tryck på ▲/▼ knappen då guiden visas. Tryck på OK knappen för att gå till den valda kanalen.

Ikoner


	Låst program
	Krypterat program
	Åldersgräns (minimum ålder för att se program)
	HD-program
	Upplösning
	Planerat program
	Ljudbeskrivning
	Undertext
	Teletext
	Multiljud
	Bildformat
	Dolby Digital ljud
	Dolby Digital Plus ljud

Kanallista

Tryck på **MENU** knappen och välj **Kanallista**.

Ändra kanaler

Välj en kanal du vill se och tryck på **OK** knappen. Den kanal som visas ändras.

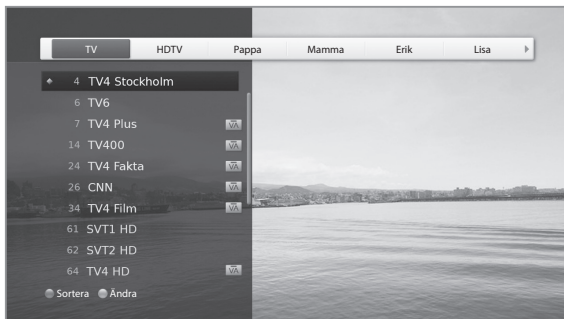

	Ändra lista Tryck på ► knappen för att visa de olika listorna. (TV, HDTV, Pappa, Mamma osv)
	Sortera kanaler Tryck på den RÖDA knappen för att sortera kanalerna i numerisk eller alfabetisk ordning.

Obs:

- : Låst kanal, : Krypterad kanal
- Tryck på i-knappen för detaljerad kanalinformation.
- Tryck på **EXIT** för att lämna.

Redigera kanallista

Välj den kanal du vill redigera och tryck på den **GRÖNA** knappen.

Favorit	Sätta favoritkanal Välj en lista där du vill spara din favoritkanal. Tryck på OK knappen. För att ta bort en kanal från en lista, välj listan och tryck på OK knappen.
Lås	Låsa kanal Välj Av eller På.

Obs:

- Standardlösenord är 0000. Om du har glömt lösen kontakta Kundtjänst.
- För att redigera flera kanaler välj **MENU > Inställningar > Redigera kanaler**.

Redigera kanaler

Redigera kanallista

 **MENU** > Inställningar > Redigera kanaler > Redigera favoritlista

Att **redigera favoritlista** hjälper dig att kunna lägga till eller ta bort kanaler från en kanallista.



Obs: Tryck på **MENU** eller **EXIT**-knappen för att lämna. Tryck på **BACK**-knappen för att gå till föregående meny.

 RÖD	Lägga till kanal i en lista Välj kanal genom att använda ▲/▼ och OK knappen i den vänstra kolumnen och tryck sedan RÖD knapp. Den valda kanalen hamnar då i den högra kolumnen. Ta bort kanal från lista Välj kanal genom att markera kanal i den högra kolumnen via ▲/▼ och OK knappen och tryck sedan på RÖD knapp.
 GRÖN	Redigera lista För att placera kanaler i en lista i den vänstra kolumnen, tryck den GRÖNA knappen och välj den lista du önskar. Flytta en favoritkanal Välj kanal genom att använda ▲/▼ och OK knappen i den högra kolumnen och tryck sedan GRÖN knapp. Flytta de valda kanalerna till önskad position genom att använda ▲/▼ och OK knappen.
 GUL	Ändra lista För att visa kanaler i en annan lista tryck GUL knapp och välj lista.
 BLÅ	Ändra bakgrundskanal Du kan ändra kanalen som visas i bakgrunden trots att du redigerar dina listor. Välj kanalen du vill se genom att trycka BLÅ knapp. Kanalen i bakgrunden ändras då.
 OPT+	Ändra namn på lista Välja/Ta bort samtliga kanaler i lista

Numrering av kanaler i lista


 **MENU** > Inställningar > Redigera kanaler > Favoritkanalnumrering

Här kan du ändra ordningen **på** kanaler i din valda favoritlista.

TV Guide

Du kan nå TV Guiden på två sätt.

- Tryck på **GUIDE**-knappen.
- Tryck på **MENU**-knappen och välj **TV Guide**.

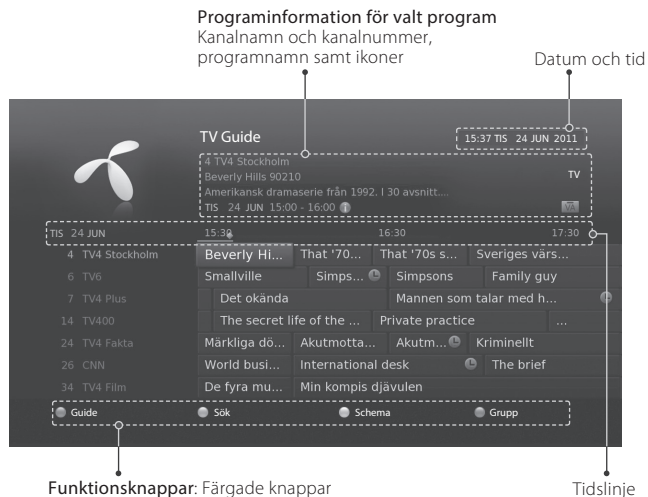

Obs:

- Tryck på i-knappen för detaljerad program information.
- : Schemalägga program (BLÅ: Påminnelse), : Nuvarande tid

Titta på program

1. Välj program och tryck på **OK** knappen.
2. Tryck på **OK** knappen igen för att lämna Programguiden och se på programmet.

Sätta påminnelser

1. Välj ett framtida program och tryck på **OK** knappen.
2. Välj **Påminnelse** och tryck på **OK** knappen.
3. Tryck på **OK** knappen igen för att avbryta påminnelsen.
Reserverade program läggs automatiskt till i **Schema**.

Obs: Om kanalen är låst så kommer du att få ange lösenord. Standardlösenord för kortet är 1234. Om du har glömt din lösenord, kontakta kundtjänst.

Redigera kanallista

För att ta fram TV Guide för en annan kanallista, tryck **BLÅ** knapp och välj rätt lista.

Obs: För att söka efter ett specifikt program, gå till **Sök** genom att trycka den **GRÖNA** knappen.

Sök program

Sökfunktionen hjälper dig att hitta specifika program. Man kan söka på Nyckelord eller på Genre.



Nyckelord

1. Tryck på den **GRÖNA** knappen.
2. Välj **Nyckelord** och tryck på ► knappen.
3. Skriv in ord och tryck på **OK** knappen.

Obs: För att söka nytt ord, välj **Nytt nyckelord**.

Genre


1. Tryck på den **GRÖNA** knappen.
2. Välj **Genre** och tryck på ► knappen.
3. Välj en genre och tryck på **OK** knappen.
4. Välj rätt genre och tryck på **OK** knappen.

Obs:

- Tryck på i-knappen för att få detaljerad programinformation.
- Tryck på **OK** knappen för att starta valt program.

Sätta påminnelser

Påminnelser visar en lista med alla påminnelser och du kan även ändra dem.

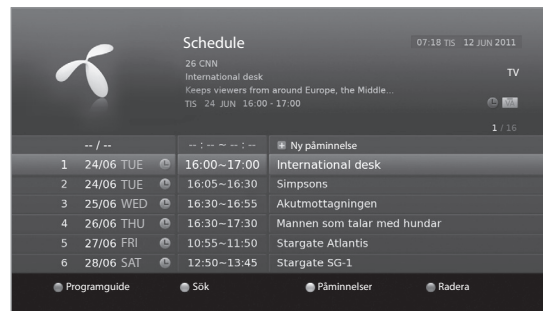

1. Tryck på den **GULA** knappen.
2. Du kan lägga till, ändra eller ta bort påminnelser.
 - För att lägga till välj **Ny påminnelse** och tryck på **OK** knappen.
 - För att ändra, välj en påminnelse och tryck på **OK** knappen.
 - För att radera en påminnelse, välj en påminnelse och tryck på den **BLÅ** knappen.
3. **Påminnelsen** kommer upp i en pop-up. Du kan ändra påminnelsen genom att använda ▲/▼/◀/▶, **NUMERISKA(0-9)** och **OK** knappen.
4. Välj **OK** för att spara och gå ur menyn.

Obs:

- Tryck på i-knappen för att få detaljerad program information.
- Du kan enkelt sätta påminnelser i din **TV Guide**, i **Sök** eller om du har tagit fram detaljerad information.

Inställningar

Barnlås

- **Ändra STB-lösenord:** Ange nytt lösenord.

Obs:

- Standardlösenord är 0000. Om du har glömt ditt lösenord, kontakta kundtjänst.
- Ange lösenord för att se låsta program.

Språk

Du kan sätta språk i menyer, primärt och sekundärt språk samt inställning för hörselskadade.

Tid Av-/Påslagningstimer

Du kan ange efter vilken tid som HD-boxen skall slå på eller stänga av sig.

Obs: Se till att strömmen för påslagningstimern och avstängningstimern ställs in separat.

Video

- **Bildskärmsformat:** Välj rätt bildskärmsformat för din tv.
- **Upplösning:** Välj rätt upplösning för din tv.
- **Bildformat:** Välj rätt bildformat för din tv.
- **TV SCART:** Välj rätt videosignal för din SCART-kontakt.

Ljud

- **Syntolkning:** Välj **Av** eller **På**.
- **Digital ljudutgång:** Välj mellan Stereo och Multikanal.
- **Läppsynk:** Du kan ändra synkroniseringen mellan ljud och bild.

Skärmvisning

- **Infovisningstid:** Du kan välja hur länge programinformationen om den nya kanalen du valt skall visas.
- **Transparens:** Du kan välja hur transparenta menyerna skall vara.
- **Textningstypsnitt:** Du kan välja font på undertexter.

I Installationsmenyn kan du söka tillgängliga tv- och radiokanaler.



Autosökning

Du kan söka kanaler automatiskt utan att ange några andra uppgifter.

 **MENU** > Inställningar > Installation > Sök kanaler

- 1 Välj **Autosökning**.
Kanalsökning startar.
- 2 Välj **Spara** och tryck på **OK** knappen för att spara resultatet.

Obs: Välj **Stopp** och tryck på **OK** knappen för att avbryta sökningen.

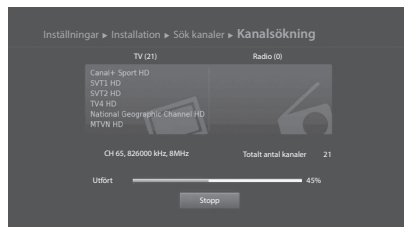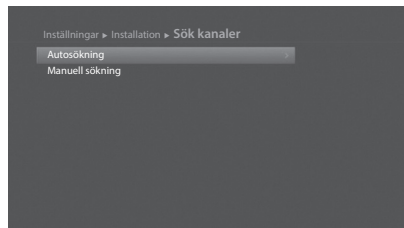

Manuell sökning

Kanalsökning kan genomföras manuellt. Rekommendation är att genomföra automatisk sökning av kanaler.

 **MENU** > Inställningar > Installation > Sök kanaler

- 1 Välj **Manuell sökning**.
- 2 Sätt sökparametrar.
 - **Frekvens:** Ange frekvens.
 - **Symbolhastighet:** Ange symbolhastighet
 - **Nätsökning:** Välj **Av** eller **På**.
- 3 Välj **Sök** och tryck på **OK** knappen.
- 4 Välj **Spara** och tryck på **OK** knappen för att spara resultatet.



Obs: Välj **Stopp** och tryck på **OK** knappen för att avbryta sökningen.

Programuppdatering (OTA)

För att få optimal prestanda är det viktigt att ha den senaste programvaran. På Humax hemsida finns senaste nytt och senast släppta programversioner. (<http://www.humaxdigital.com>) Vi rekommenderar att du regelbundet kontrollerar om det finns nya programvaruuppggraderingar. OTA är en förkortning av **Over-the-Air**, vilket innebär att programvaran kan laddas ner via antenn kabeln.

Tillverkaren förbehåller sig rätten att bestämma när och var programvara ska släppas genom den här processen. Du kan även söka och ladda ner ny programvara manuellt.

 **MENU** > Inställningar > Installation > Programuppdatering

Autouppdatering

1. Välj **Autouppdatering** och tryck **OK** knappen för att söka efter ny mjukvara.
2. När ny mjukvara hittats, välj **Ja** för att starta uppdatering.

Manuell uppdatering

1. Välj **Manuell uppdatering** och tryck **OK** knappen.
2. Ange val manuellt:
 - **Frekvens:** Ange frekvens.
 - **Symbolhastighet:** Ange symbolhastighet.
3. Välj **Sök** och tryck på **OK** knappen för att söka efter ny mjukvara.
4. När mjukvara är funnen, välj **Ja** för att uppdatera HD-boxen.


När uppdateringen är klar kommer HD-boxen att stängas av och slås på automatiskt.

Obs:

- Det kan ta 5-10 minuter att utföra uppdatering.
- Funktioner som Påminnelser kommer ej att fungera under uppdatering.

Försiktighet:

- Var noga med att inte bryta strömmen på HD-boxen under uppdatering då den kan sluta fungera efter detta.
- Var noga med att inte dra ur RF kabeln under uppdatering då HD-boxen kan sluta att fungera.

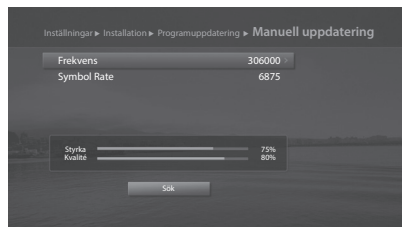

Fabriksåterställning

 **MENU** > Inställningar > Installation

1. Välj **Fabriksåterställning**.
2. En popup dyker upp. Välj **Ja**.
3. Du blir ombedd att ange lösenord. Ange lösenord.

Obs: Standardlösenordet är 0000. Om du har glömt ditt lösenord, kontakta kundtjänst.

Varning: Observera att när du utför fabriksåterställning kommer all användarkonfigurerad data återställas. Strax efter att du slutför fabriksåterställningen, kommer installationsguiden att visas automatiskt.

System

Systeminformation

Du kan se systeminformation.

Signaldetektering

Du kan se signalstyrka och kvalitet på kanalerna.

Strömhantering

- **Autonedstängning:** Välj **På** för att automatiskt komma till viloläge om ingen användarinteraktion sker inom 3 timmar.

Obs: Ett meddelande visas i 30 sekunder innan produkten går in i viloläge. Om du ignorerar meddelandet går HD-boxen automatiskt i viloläge.

Krypteringssystem

Du kan se information gällande krypteringssystemet.

Felsökning

Innan du kontaktar kundtjänst, se till att läsa tipsen nedan noggrant. Om problemet kvarstår efter att du har slutfört följande procedur, kontakta kundservice för vidare instruktioner.

1. Standby LED tänds inte.

- Kontrollera huvudströmkabeln och se till att den är ansluten till ett lämpligt eluttag.
- Kontrollera att strömförsörjningen är påslagen. (på baksidan av HD-Boxen)
- Anslut om möjligt strömkabeln till ett annat eluttag.
- Se till att strömbrytare på baksidan är påslagen.

2. Ingen bild

- Tryck på **STANDBY**-knappen och kontrollera att produkten är påslagen och i driftläge.
- Kontrollera att ljud-/bildkabeln är ordentligt ansluten till TV.
- Se till att antennkabeln är korrekt ansluten till produkten.
- Se till att aktivera kanalsökning.
- Kontrollera ljusstyrkan på TV apparaten.
- Kontrollera om kanalen för närvarande visas.

3. Dålig ljud/bildkvalitet

- Kontrollera att det inte finns någon mobiltelefon eller mikrovågsugn i närheten av produkten.
- Håll strömkabeln och RF-kabel från varandra.

4. Inget eller dåligt ljud

- Kontrollera att din ljud-/bildkabel är rätt ansluten.
- Kontrollera volymnivån på tv:n och HD-boxen.
- Kontrollera om antingen tv:n eller HD-boxen är på mute/tystläge och avaktivera detta.
- Kontrollera vilken typ ljud eller ljudspår som finns tillgängliga.

5. Fjärrkontrollen fungerar inte.

- För att kontrollera produkten, peka den övre änden av fjärrkontrollen direkt mot fjärrkontrollsensorn på HD-boxen.
- Ta ur och sätt i batterierna i fjärrkontrollen eller byt ut dem mot nya batterier.

6. Saknar information om lösenord till HD-Boxen.

- Standardlösenord till HD-Boxen är 0000.

7. Kan inte uppdatera ny mjukvara.

- Om HD-boxen inte visar ett meddelande som säger att den behöver ny mjukvara så har den rätt mjukvara.

8. Kan inte se krypterade kanaler (betalkanaler).

- Kontrollera att du har rätt programkort. Sätt i programkortet och se till att det är korrekt isatt. Guldchippet ska vara nedåt och inåt i HD-boxen.
- Kontrollera i menyn att HD-boxen hittar programkortet.
- Kontrollera i menyn att du har en giltig prenumeration på de kanaler du vill se på. Kontakta kundtjänst för mer information.
- Kontrollera att programkortet inte är skadat.

9. Kan inte titta på betalkanaler.

- Check in the menu that you have a valid and working subscription to the channels you wish to view. Contact your network operator for more information.

Specifikation

Strömförsörjning

Ingångsspänning:	Detaljerad programinformation
Typ:	Adapter
Effektförbrukning:	12V d.c. /1.0A (Viloläge: under 0.5W)
Skydd:	Separat intern säkring. Ingången ska skyddas mot blixtnedslag.

Fysisk Specifikation

Storlek (B x D x H):	135 x 135 x 30(mm)
Vikt (Netto):	194g
Arbets temperatur:	0 °C till +40 °C
Förvaringstemperatur:	-10 °C till +70 °C

Notera: Specifikationerna kan ändras utan föregående meddelande.

Open Source Software Notice

HUMAX products use certain open source operating system software distributed pursuant to GNU GENERAL PUBLIC LICENSE Version 2, and GNU LESSER GENERAL LICENSE Version 2.1 each as defined and published by the Free Software Foundation, Inc.

The following GPL and LGPL software source codes included in this product can be provided and their use is valid for up to three years from the date of original download of the software or purchase of product containing such software. Please contact us at gnuhumaxdigital.com.

GPL Software

busbox

LGPL Software

uCLiC

FreeType License (FTL) Software

FreeType

Portions of this software are copyright © <2007> The FreeType Project (www.freetype.org). All rights reserved.

Use, modification and redistribution of the Open Source Software is governed by the terms and conditions of the applicable Open Source License. The GNU General Public License (GPL) v2 is shown below.

The GNU General Public License (GPL)

Version 2, June 1991

Copyright © 1991 Free Software Foundation, Inc. 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA. Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software—to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too. When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know what you are doing.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of a program, you have obligations to your community: you must make sure the recipients all receive source code, you must make sure you give them the right to copy, and you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder stating it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law; that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each license is addressed as "you". Activities other than copying, distribution and modification are not covered by this license; however, the copyright owner is authorized to permit the Program to be restricted, and the output from the Program is

covered only if its contents constitute a work based on the Program. (Independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty, keep intact all the notices that this license and the original copyright notice contain, and give any other recipients of the Program a copy of this license along with the Program. You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of this license above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this license.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this license. (If the program is an interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified code only if you have received identifiable sections of that work from the Program, and if the sections are derived from the Program, and are reasonably considered independent and separate works in themselves, then this license, and its terms, do not apply to those sections; however, if you combine the sections with other material you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this license, which requires that you extend the license to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; but the intent is to prevent the control of the distribution of derivative or collective works based on the Program. In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this license.

3. You may copy and distribute the Program (or a work based on it, under section 2) in object code or executable form under the terms of sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to provide the complete corresponding machine-readable source code, either on a medium customarily used for software interchange, or to perform source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of sections 1 and 2 above on a medium customarily used for software interchange.

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.) The source code for a work means the preferred form for making modifications, including any scripts used to control compilation and installation of the executable.

However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system in which the program is run, provided that component itself accompanies the executable. If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as compliance with this provision, even though third parties are not compelled to copy the source along with the object code.

4. You may copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties may still convey material which is derived from the Program under this license, even though third parties are not compelled to copy the source along with the object code.

5. You are not required to accept this license, since you have not signed it. However, nothing else grants you permission to modify

or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), you must also pass a copy of this license along with the object code to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you by third parties (as a form of legal aid or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then only you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances. It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; the purpose of this section is to protect the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through this system in reliance on these principles. It is our hope that you will also act honorably in this regard; and that the application of this section will be to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries by patent claims or by other rights, the copyright holder, or other copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, provided that the restriction is justified by patent claims asserting the right to exclude. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

10. You may write specific conditions for the distribution of the Program, provided you make them conform to the four general requirements specified in section 5. You may also write specific conditions for the distribution of the Program, provided you make them conform to the four general requirements specified in section 5.

11. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

12. In no case shall the copyright holder be responsible for enforcing the terms of this License. The copyright holder for this program is the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA. Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as a successor to the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software—to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages—typically libraries—of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below. When we speak of free software, we are referring to freedom of use, not price. Our General licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you know what you are doing.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library, or if you modify it. For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link only with the library, you must provide complete object files to the recipients, so that they can link them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy and distribute and/or modify the library. To protect your rights, we want to make sure you pay attention to the conditions for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any

free software which everyone can redistribute and change under these terms. To do, so, attach the following notices to the program. It is safest to attach them to the start of each source file to make most effectively convey the exclusion of warranty; and each file should have at least the copyright line and a pointer to where the full notice is found.

One line to give the program's name and a brief idea of what it does. Copyright (C) yyyy, name of author This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version. This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details. You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA. Also add information on how to contact you by electronic and paper mail. If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

Gnomovision version 69 Copyright (C) year name of author Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type 'show w'. This is free software, and you are welcome to redistribute it under certain conditions. type 'show c' for details.

The hypothetical commands 'show w' and 'show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than 'show w' and 'show c'; they could even be menu-driven or dialog boxes. It is up to you. If you are distributing a program that is a derivative work of a program, you should also get your employer (if you work as a programmer) or your school, if any, to sign a copyright disclaimer for you, in the form of a legal document. Here is a sample; alter the names Yoyodyne, Inc., hereby disclaims all copyright interest in the program 'Gnomovision' (which includes passes at compilers) written by James Hacker.

Copyright © 1989 by T. Coon, 1 April 1989
T. Coon, President of VICE
This General Public License does not permit incorporating your program into proprietary programs. If you are distributing a library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to use, the GNU Lesser General Public License may be more to your liking.

GNU Lesser General Public License (LGPL)

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc. 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA. Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as a successor to the GNU Library Public License, version 2, hence the version number 2.1.]

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software—to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages—typically libraries—of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below. When we speak of free software, we are referring to freedom of use, not price. Our General licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you know what you are doing.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library, or if you modify it. For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link only with the library, you must provide complete object files to the recipients, so that they can link them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy and distribute and/or modify the library. To protect your rights, we want to make sure you pay attention to the conditions for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any

free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license. Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries. The reason for this is that the ordinary GNU General Public License, we use this license for certain libraries in order to permit linking those libraries into non-free programs. When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser License permits a wider range of linking for linking other code with the library. We call this license the "Lesser" General Public License because it does less to protect the user's freedom than the ordinary General Public License. It provides the freedom for software developers less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances. For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License. In other cases, a particular library is the basis for non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables a greater number of people to use the GNU operating system, as well as its variant, the GNU/Linux operating system. Although the Lesser General Public License is less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library. The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the conditions in Section 6, which deal with the library and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each license is addressed as "you". A "library" means a collection of software functions and/or data prepared for use by other programs. Application programs (which use some of those functions and data) to form executables. The "Library", below, refers to any such software library or work which is not a derivative of the Library. A "work based on the Library" means either the Library or any derivative work under copyright law; that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. Hence, this license does not include without limitation in the term "modification") "Source code" for a work means the preferred form of the work for making modifications to it. For a library, this includes the source code, and for other types of code for all modules, it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library. Activities other than copying, distribution and modification are not covered by this License; for example, teaching or assisting others in running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library. Under the terms of this License, you are permitted to write it. Whether it is true depends on what the library does and what the program that uses the library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty, keep intact all the notices that refer to this License and to any warranty, and you must also distribute a copy of this License along with the Library. You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in addition to the warranty provided by the copyright holder.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of the following conditions:

- The modified work must itself be a software library.
- You must cause the files modified to carry prominent notices stating that you changed the files and the date you did so.
- You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility,

otherwise as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful. (For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by the library must compute square roots and provide it.) This requirement applies to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the entire modified work as a single entity, you must make the whole of the work, those permissions for other licensees extend to the entire whole, and thus to each and every part regardless of how the work is divided.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library. In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License instead. You may, at your option, also choose to apply the terms of this License if a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead (you may also do this even if there are no notices that refer to this License; this change will have no effect on you). Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy. This option is useful if you wish to copy parts of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it) under the terms of the ordinary GNU General Public License in terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of this License. You may charge a medium customarily used for software interchange. If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License. However, linking the Library with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the Library". The section of the Library that is included in this executable is not a derivative of the Library, but the section of the Library that is included in this executable is not a derivative of the Library.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library. The object code for the work is a derivative of the Library if and only if the work is a derivative of the Library. This is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined. It depends on the file's name, its parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the work is a derivative of the Library. The use of the work is a derivative of the Library. Executables containing this object code plus portions of the Library will still fall under Section 6).

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. If you executeables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under the terms of your choice, provided that the terms permit modification of the work and the user's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is part of the distribution. You must also make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful. (For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by the library must compute square roots and provide it.) This requirement applies to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the entire modified work as a single entity, you must make the whole of the work, those permissions for other licensees extend to the entire whole, and thus to each and every part regardless of how the work is divided.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library. In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License instead. You may, at your option, also choose to apply the terms of this License if a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead (you may also do this even if there are no notices that refer to this License; this change will have no effect on you). Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy. This option is useful if you wish to copy parts of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it) under the terms of the ordinary GNU General Public License in terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of this License. You may charge a medium customarily used for software interchange. If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License. However, linking the Library with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the Library". The section of the Library that is included in this executable is not a derivative of the Library, but the section of the Library that is included in this executable is not a derivative of the Library.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library. The object code for the work is a derivative of the Library if and only if the work is a derivative of the Library. This is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined. It depends on the file's name, its parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the work is a derivative of the Library. The use of the work is a derivative of the Library. Executables containing this object code plus portions of the Library will still fall under Section 6).

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. If you executeables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under the terms of your choice, provided that the terms permit modification of the work and the user's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is part of the distribution. You must also make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful. (For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by the library must compute square roots and provide it.) This requirement applies to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the entire modified work as a single entity, you must make the whole of the work, those permissions for other licensees extend to the entire whole, and thus to each and every part regardless of how the work is divided.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library. In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License instead. You may, at your option, also choose to apply the terms of this License if a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead (you may also do this even if there are no notices that refer to this License; this change will have no effect on you). Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy. This option is useful if you wish to copy parts of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it) under the terms of the ordinary GNU General Public License in terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of this License. You may charge a medium customarily used for software interchange. If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License. However, linking the Library with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the Library". The section of the Library that is included in this executable is not a derivative of the Library, but the section of the Library that is included in this executable is not a derivative of the Library.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library. The object code for the work is a derivative of the Library if and only if the work is a derivative of the Library. This is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined. It depends on the file's name, its parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the work is a derivative of the Library. The use of the work is a derivative of the Library. Executables containing this object code plus portions of the Library will still fall under Section 6).

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. If you executeables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License instead. You may, at your option, also choose to apply the terms of this License if a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead (you may also do this even if there are no notices that refer to this License; this change will have no effect on you). Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy. This option is useful if you wish to copy parts of the code of the Library into a program that is not a library.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it, and any later version, you have the option of following the terms and conditions of either that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivative works and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. USE OF THE LIBRARY IS AT YOUR OWN RISK.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REPAIR THE LIBRARY, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF OR FROM THE LIBRARY, INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE. EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively ensure that all the user's copies of the library, and every derivative work, have at least the copyright line and a pointer to where the full notice is found. One line is to give the library's name and an idea of what it does. Copyright (C) year by the copyright holder. All rights reserved. This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library. If not, write to the Free Software Foundation, Inc., 51 Franklin Street, Boston, MA 02110-1301 USA. Also include information on how to contact you by electronic and paper mail. You should also get your employer (if you work as a programmer) or your school, if you, to sign a "copyright disclaimer" for the library, if you are an employer. Here is a sample of the desired text: "Yoodyne, Inc., hereby disclaims all copyright interest in the library 'Yoodyne' (a library for twacking knobs) written by James Random Hacker. 1 April 1993. Fred Coon, President of Yoodyne."

You should have received a copy of the GNU Lesser General Public License along with this library. If not, write to the Free Software Foundation, Inc., 51 Franklin Street, Boston, MA 02110-1301 USA. Also include information on how to contact you by electronic and paper mail. You should also get your employer (if you work as a programmer) or your school, if you, to sign a "copyright disclaimer" for the library, if you are an employer. Here is a sample of the desired text: "Yoodyne, Inc., hereby disclaims all copyright interest in the library 'Yoodyne' (a library for twacking knobs) written by James Random Hacker. 1 April 1993. Fred Coon, President of Yoodyne."

You should have received a copy of the GNU Lesser General Public License along with this library. If not, write to the Free Software Foundation, Inc., 51 Franklin Street, Boston, MA 02110-1301 USA. Also include information on how to contact you by electronic and paper mail. You should also get your employer (if you work as a programmer) or your school, if you, to sign a "copyright disclaimer" for the library, if you are an employer. Here is a sample of the desired text: "Yoodyne, Inc., hereby disclaims all copyright interest in the library 'Yoodyne' (a library for twacking knobs) written by James Random Hacker. 1 April 1993. Fred Coon, President of Yoodyne."